



680W | PLATINUM KING LED 680W

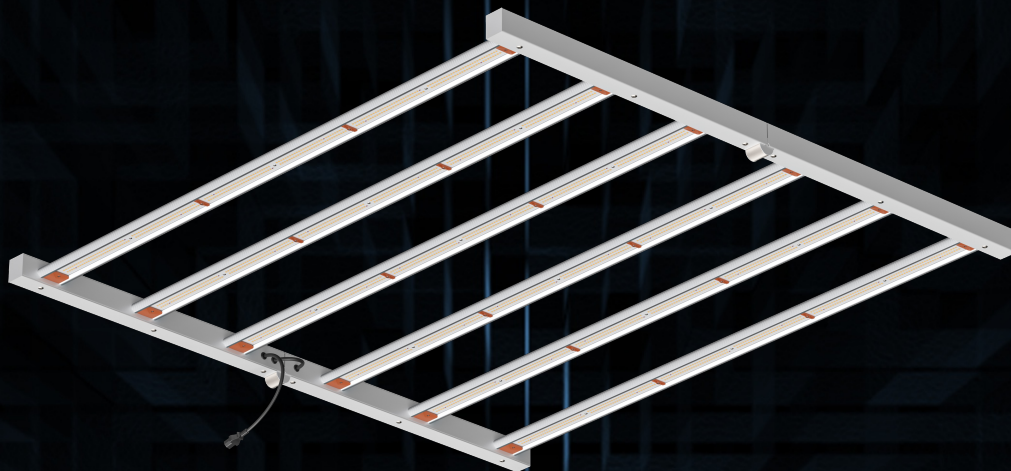

SPECIFICATIONS

Light Source	LED
Number of Light Bars	6
LED Quantity	1980pcs
PPF	1904 μ mol/s
Input Power	680W
Efficacy	2.8 μ mol/J
Input Voltage	Autosensing 220-240V
Fixture Dimensions	1105*1067*54mm
Mounting Height	$\geq$ 15.2cm Above Canopy
Thermal Management	Passive
Lifetime	50,000hrs
Power Factor	$>$ 90%
Colour Rendering Index	80ra
Ambient Temperture	25~40°C
Storage Environment	-40~85°C RH10%~95%
Chip	Sanan LEDS

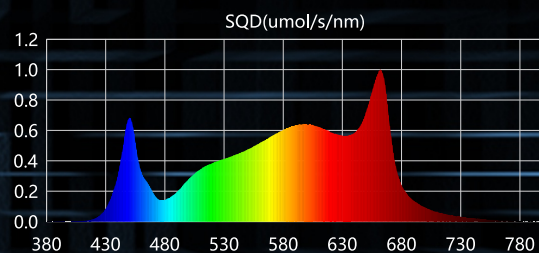

Max amperage by voltage service

VOLTAGE	220V	240V
AMPERAGE	3.09A	2.83A